



DESCRIPTION

ALCO Shield™ Black MAG Ice and Water Protector is designed for use as a shingle underlayment in critical areas of the roof, such as eaves, valleys, ridges, dormers and skylights. ALCO Shield Black MAG protects roof structures and the interior from water penetration caused by ice dams and wind driven rains.

ALCO Shield Black MAG is a polymer modified asphalt membrane, glass fiber reinforced with a black granular surface providing skid and tracking resistance during installation, as well as sealing around the shingle fasteners for the life of the shingles.


FEATURES

- Self-adhering, but initially repositionable for easy installation
- High tack back adhesive provides for all season installation
- Granular surface provides the anti-skid feature to keep workers safe
- Exceptional manufacturing process and quality control for a consistent product
- Meets or exceed industry standards and residential/commercial Model Building Codes
- **Made in Detroit - USA**

ADVANTAGES

- Prevents water intrusion and seepage from wind-driven rain, ice dams and around fasteners
- Self-Sealing: Seals around nails, staples and screws
- Self-Adhering: Bonds directly to the roof substrate
- Skid Resistant: Granular surface for safe and easy installation
- Excellent for under asphalt shingles

The ALCO Shield Black MAG underlayment product offers a high degree of skid resistance combined with the highest standards of manufacturing.

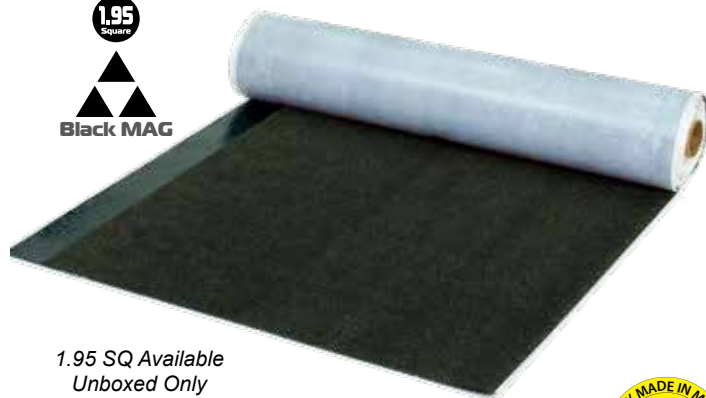

1.95 SQ Available
Unboxed Only



ALCO Products offer installers a complete line of roof protection products.

Your Second Line of Defense™

800.323.0029 | www.alco-products.com

alco™

PREPARATION

Sweep roof deck to remove dirt and debris. The roof deck must be clean, smooth and free of moisture. If moisture is present it will limit or inhibit adhesion.

On re-roofing, remove all old material from roof deck area to be covered with ALCO Shield Black MAG. Replace any damaged sheathing to assure a solid deck. If pre-existing self-adhered underlayment is present and cannot be easily removed to the deck, recover it with the ALCO Shield Black MAG underlayment.

WEATHER CONDITIONS

Apply when air temperature is over 40° F (5° C) but below 100° F (38° C). If applied in temperatures below 40° F (5° C), ALCO Shield is stiffer and will not fully seal until it is warmed by exposure to the sun. If applied in temperatures above 100° F (38° C), it may become difficult to remove the release poly backing. If this situation should occur, move product to a shaded area until cool. Once cooled, the release poly backing can be easily removed. **Storage:** ALCO Shield Black MAG should be stored out of direct sunlight to avoid the above adhesion and handling issues.

INSTALLATION

ALCO Shield is applied directly to the surface of the roof deck. ALCO Shield is designed to be covered by roofing material on slopes of 3" rise in 12" run or greater. See carton for complete instructions and precautions.

COLD WEATHER INSTALLATION: Mechanically fasten, "back-nail", membrane into position until it has bonded to the roof deck and to provide safe walking conditions on the roof.

FOR EXTERIOR USE ONLY

COVERAGE

1.95 SQ Roll Covers Approximately 195 SF

PACKAGING

1.95 SQ Roll - Unboxed 36/Pallet

SPECIFICATIONS

ASTM D-1970

FOR FURTHER SAFETY INFORMATION SEE SDS REGARDING THIS PRODUCT

LIMITATIONS

Follow all good roofing practices and safety procedures when working on a roof, roofing is dangerous.

- Should not be applied over shingles or underlayment of any sort
- Should not be applied over damp surfaces
- Should not be left exposed to sunlight for more than 30 days (less if extreme heat conditions exist)
- ALCO Shield Black MAG is NOT a long term "Dry-In" product – cover it as soon as practical with the permanent roof covering!
- **Caution!!** Surface can be slippery if wet or covered with frost

PROPERTIES

Approximate Roll Weight:

1.95 Square 55 Lbs (nominal)

Membrane Width:

Membrane 36"

Release 37.5"

Membrane Length:

1.95 Square Roll 65.0 Feet

Membrane Thickness: 45—55 mils

Application Method: Self Adhering

Surface Composition: Granules – Black Mag

Membrane Reinforcement: Fiberglass Mat

Backing Material: Silicone Coated Release Film

Always refer to our Website for updates.



We warrant our material to be of good quality and will replace materials found defective, providing, however, that the buyer shall examine the materials when received and promptly notify us of any defects before the materials are used or incorporated into a structure for which they are intended. CONTACT YOUR SALES REPRESENTATIVE OR SEE OUR WEB SITE FOR COMPLETE DETAILS.